

Split Heat Pump standard version




| Specifications | | Aquapura Split 200esm | Aquapura Split 250i /250esm | Aquapura Split 300i |
|---|------|-----------------------|-----------------------------|---------------------|
| Nominal Capacity | l | 200 | 250 | 300 |
| Thermal Power (Med/Max) | W | 1920/3200 | 1920/3200 | 1920/3200 |
| Power Consumption (Med/Max) | W | 600/1000 | 600/1000 | 600/1000 |
| Temperature (Factory Setpoint) | °C | 52 | 52 | 52 |
| Maximum Temperature | °C | 80 | 80 | 80 |
| Max. Amount of water at 40°C in a run (St./En.) | l | -/290 | 330/345 | 375/- |
| Maximum Operation Pressure | bar | 6 | 6 | 6 |
| Sound Power Level | dB | 33 | 33 | 33 |
| Liquid Line | Pol. | 1/4 | 1/4 | 1/4 |
| Suction Line | Pol. | 3/8 | 3/8 | 3/8 |
| Electrical back-up power | W | 1500 | 1500 | 1500 |
| Gross Weight of Cylinder (St./En.) | Kg | -/73 | 62/83 | 74/- |
| Electrical Supply | V/Hz | 230/50 | 230/50 | 230/50 |

**LOW-COST EFFICIENT SOLUTION
SILENCE AT HOME**

COP 3,5



Technical drawing

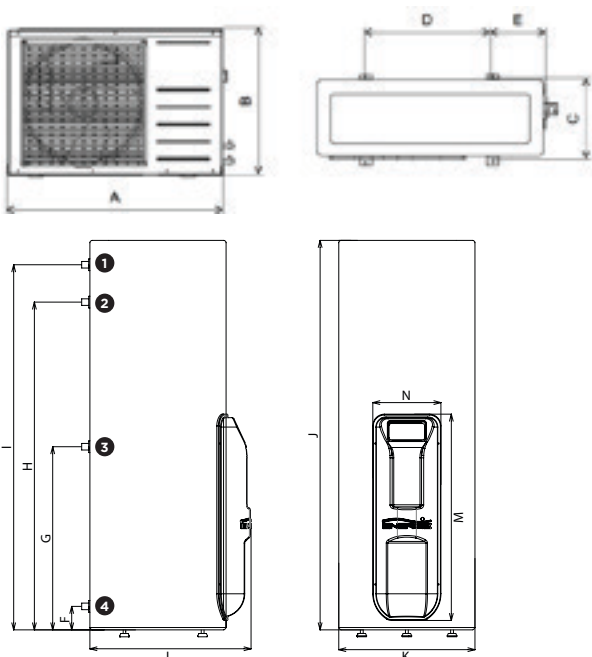

Dimensions 200esm 250i/250esm 300i

| | | | |
|---|------|------|------|
| F | 74 | 74 | 74 |
| G | 650 | 815 | 815 |
| H | 1146 | 1326 | 1543 |
| I | 1274 | 1454 | 1671 |
| J | 1350 | 1530 | 1750 |
| K | 580 | 580 | 580 |
| L | 685 | 685 | 685 |
| M | 879 | 879 | 879 |
| N | 290 | 290 | 290 |

| Dimensions | Outdoor Unit |
|------------|--------------|
| A | 700 |
| B | 525 |
| C | 250 |
| D | 458 |
| E | 120 |

| | |
|--------------------------|-------------|
| 1 (Hot water) | 3/4" Male |
| 2 (PT valve) | 1/2" Female |
| 3 (Recirculation) | 3/4" Male |
| 4 (Cold water) | 3/4" Male |
| 5 (Coil Inlet) | - |
| 6 (Coil Outlet) | - |

With flares valves on the split unit and on the cylinder
With dielectric threads for water connections